


# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A2 

## S&P Clever Reinforcement Company AG S&P Carbophalt® G

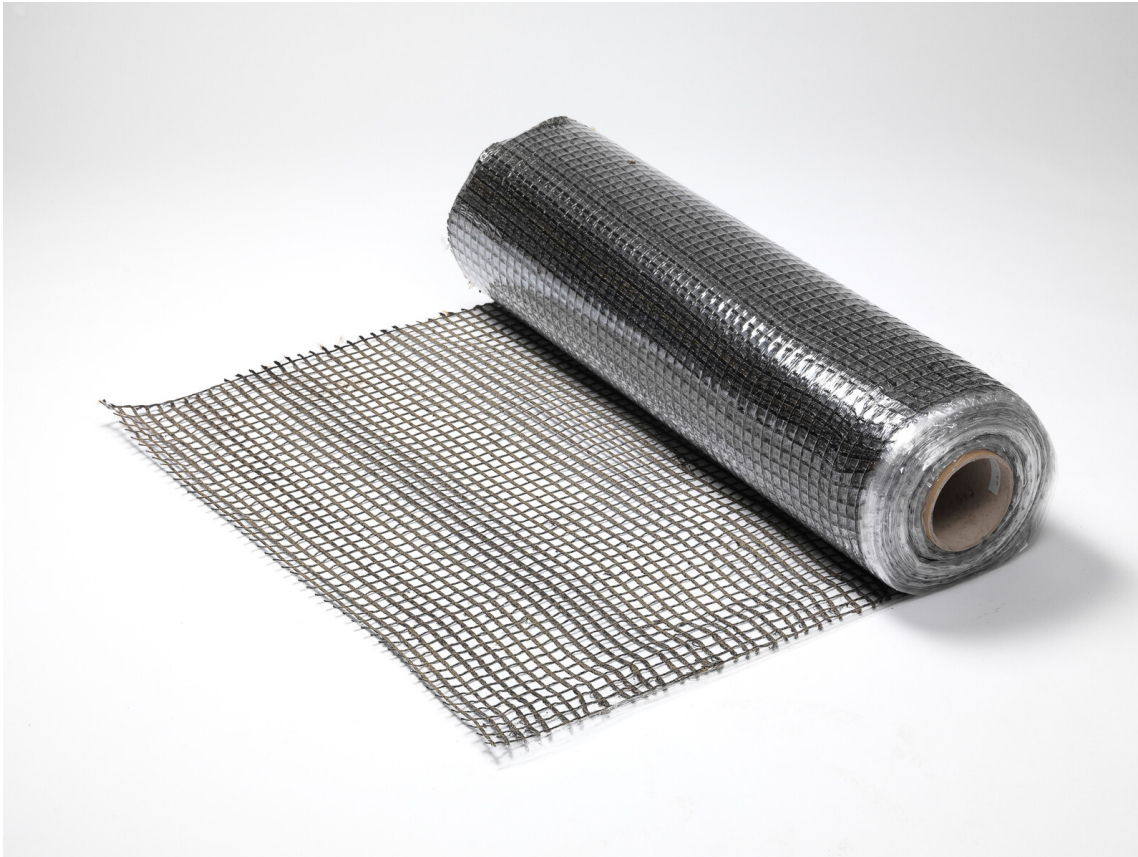

### Owner of the declaration

S&P Clever Reinforcement Company AG  
Seewernstrasse 127  
6423 Seewen  
Switzerland

### Product

S&P Carbophalt® G

### Declared product / Declared unit

1 m<sup>2</sup>

### This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,  
NPCR Part A:2021

### Program operator:

EPD Global  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway

### Declaration number

NEPD-11775-11775-2

### Registration number

NEPD-11775-11775-2

### Issue date

01.06.2026

### Valid to

31.05.2031

### EPD Software

Emidat Platform v1.0.0

## General Information

### Product

S&P Carbophalt® G

### Program Operator

EPD Global  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway  
Phone: +47 23 08 80 00  
Email: post@epd-norge.no

### Declaration Number

NEPD-11775-11775-2

### This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,  
NPCR Part A:2021

### Statements

The owner of the declaration shall be liable for the underlying information and evidence. The Norwegian EPD Foundation shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

### Declared unit

1 m<sup>2</sup>

### General information on verification of EPD from EPD tools

Independent verification of data, other environmental information and the declaration according to ISO 14025:2011-10, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD Global's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD Global, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD Global's General Programme Instructions for further information on EPD tools.

### Verification of EPD tool

Rui Wang, IVL Swedish Environmental Research Institute  
(no signature required)

### Owner of the declaration

S&P Clever Reinforcement Company AG

### Contact person

info@sp-reinforcement.ch

### Phone

+41 41 825 00 70

### Email

info@sp-reinforcement.ch

### Manufacturer

S&P Clever Reinforcement Company AG  
Seewernstrasse 127  
6423 Seewen, Switzerland

### Place of production

Poland

### Management system

-

### Issue date

01.06.2026

### Valid to

31.05.2031

### Year of study

2024

### Comparability

EPDs of construction products may not be comparable if they do not comply with EN 15804 and are not seen in a building context. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database (including primary and secondary data).

### Development and verification of EPD

The declaration was created using the Emidat EPD tool v1.0, developed by Emidat GmbH. The EPD tool has been approved by EPD Global.

Developer of EPD: Johannes Backofen

Reviewer of company-specific input data and EPD: Jacob Hansen

### Approved



Håkon Hauan, The Norwegian EPD Foundation

## Product


### Product description

S&P Carbophalt® G is a pre-bituminised glass-fiber (longitudinal) and carbon fibre (transversal) asphalt reinforcement grid designed to prevent crack reflection and increase pavement stiffness. Its bitumen impregnation ensures excellent layer bonding, high process reliability, and effective force anchorage. The grid increases pavement durability and fatigue life, reduces maintenance needs, and is suitable for asphalt pavements of all types and load classes.

### Application description

S&P Carbophalt® G is used for reinforcing asphalt layers under high traffic loads, preventing crack reflection, and improving structural performance. It supports both local repairs and full-surface rehabilitation, increasing durability, stiffness, and fatigue resistance while reducing long-term maintenance needs and associated costs.

### Production process

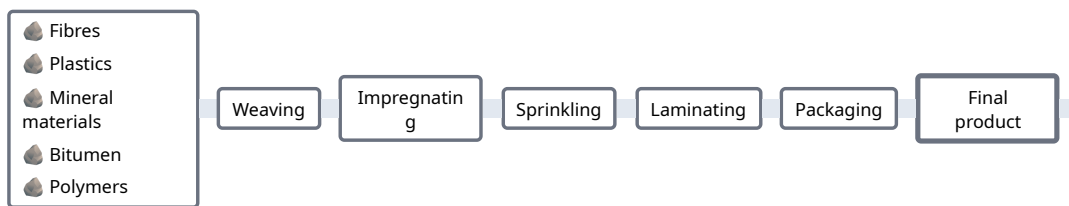

### Product specification

Name of ingredient	Share of total weight	Country of origin
Bitumen	30 - 50 %	Poland
Fibres	10 - 30 %	Slovakia
Mineral materials	10 - 30 %	Poland
Plastics	0 - 2 %	Germany
Polymers	10 - 30 %	Germany

### Technical data

	Unit	Value
Density	kg / m <sup>3</sup>	1700
E-Modulus (longitudinal)	N / mm <sup>2</sup>	73000
E-Modulus (transverse)	N / mm <sup>2</sup>	265000
Elongation (longitudinal)	%	3
Elongation (transverse)	%	1.5
Tensile strength (longitudinal)	kN / m	120
Tensile strength (transverse)	kN / m	200
Fibre cross section (longitudinal)	mm <sup>2</sup> / m	46
Fibre cross section (transverse)	mm <sup>2</sup> / m	46
Mass	kg	0.56
Thickness	mm	1

**Market**

Europe

**Recipients**

B2B

## LCA: Calculation rules

### Declared unit

1 m<sup>2</sup>


### Product lifetime

Not declared

### Reference service life

Not declared

### System boundary

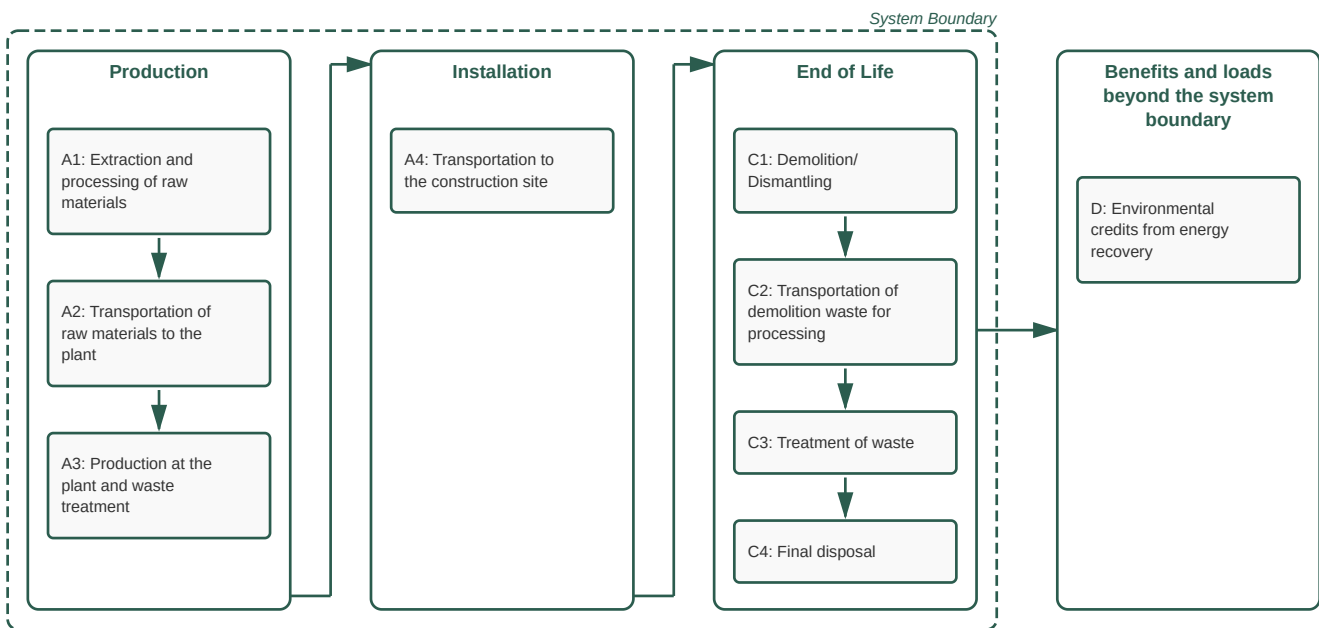

### Data quality

The foreground data are based on extensive and detailed data collection at the production site of the manufacturer, covering key processes such as raw material sourcing, formulation, and manufacturing. These foreground data are fully linked with corresponding datasets from the background database (Eurobitume, ecoinvent 3.10) or with EN15804+A2-compliant EPDs, ensuring consistency, reliability, and maintaining alignment with the latest industry standards.

The overall data representativeness is rated as good with an overall score of 4.00/5, in accordance with EN 15804+A2 Annex E guidance on data quality assessment, considering geographical, technical, and temporal representativeness.

The following table discloses all processes or activities assessed with very poor or poor data representativeness according to EN 15804+A2, as well as those assessed as fair that contribute more than 30 % to any core impact indicator in A1–A3:

Element	Minimal Representativeness	Source	Year
Recycling	Very poor	ecoinvent 3.10	2023
Incineration	Poor	ecoinvent 3.10	2023
Landfill	Poor	ecoinvent 3.10	2023
Mineral materials	Poor	ecoinvent 3.10	2023
Polypropylene strapping bands	Poor	ecoinvent 3.10	2023
Recycling	Poor	ecoinvent 3.10	2023
Fibres	Fair	ecoinvent 3.10	2023
Polymers	Fair	ecoinvent 3.10	2023

### System boundaries (X=included, MND=module not declared)

	Production			Installation		Use stage							End-of-Life				Next product system
	Raw material supply	Transport	Manufacturing	Transport	Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Demolition	Transport	Waste Processing	Disposal	Benefits and loads beyond the system boundary
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x
Geography			PL	Europe	MND	MND	MND	MND	MND	MND	MND	MND	Europe	Europe	Europe	Europe	Europe

For the geographies modeled in A1 and A2, refer to *Product specification*.

Type of EPD: Cradle to gate with options, modules A4, C1-C4 + D

#### Stage of Material Production and Construction

Module A1: Extraction and processing of raw materials

Module A2: Transportation of raw materials to the plant

Module A3: Production at the plant and waste treatment

Module A4: Transportation to the construction site

#### Disposal Stage

Module C1: Demolition/Dismantling

Module C2: Transportation of demolition waste for processing

Module C3: Treatment of waste

Module C4: Final disposal

#### Credits and burdens outside the system boundaries

Module D: Environmental credits from energy recovery

#### Cut-off criteria

No cut-offs were applied.

## **Allocation**

Foreground inventory data (energy and fuels, ancillary materials, emissions and waste) was collected at the production process level. Mass-based allocation was applied to allocate the total output of the production process in 2024 to the reference product.

## **Key assumptions and estimates**

Production process flows are allocated to the reference product, as described under allocation. The mass-based allocation assumes a uniform distribution of production impacts across co-products. Foreground inventory data is checked for consistency of production process, to ensure the validity of the allocated results.

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport to the building site (A4)	Value	Unit
Transported mass: Product and packaging	0.61	kg
Truck: Distance	500.00	km
Truck: Energy demand	1.58	MJ / t*km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Capacity utilization	53.30	%

Demolition (C1)	Value	Unit
Diesel	0.02	MJ
PM 10 emissions	3.36e-05	kg
PM 2.5 emissions	9.52e-06	kg

The demolition stage involves the physical removal of existing asphalt pavement. This can occur during road repairs, reconstruction, or complete demolition of infrastructure. The impact is calculated based on diesel burned in burning machine. Water use is considered below cut-off.

Transport to the waste facility (C2)	Value	Unit
Mass to recycling	0.56	kg
Distance to recycling	50.00	km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Capacity utilization	53.30	%
Truck: Distance	50.00	km
Truck: Energy demand	1.58	MJ / t*km

Module C2 includes the impact of transportation of material after deconstruction, during the End-of-Life stage.

Waste processing (C3)	Value	Unit
Material for recycling	0.56	kg
Recycling rate	100.00	%

Reuse, recovery and/or recycling potentials (D)	Value	Unit
Amount of secondary material that the system takes in	0	kg
Installation: Material eligible for recycling/reuse credits	0	kg
End-of-life: Material eligible for recycling/reuse credits	0	kg
Production: Exported energy eligible for credits	0.11	MJ
End-of-life: Exported energy eligible for credits	0	MJ
Substitution of electricity production, grid mix	0.03	MJ
Substitution of heat production from natural gas	0.08	MJ

Calculation of loads and benefits per EN 15804+A2. Materials that entered the product system as secondary materials in A1 do not yield credits in module D.

## LCA: Results

The following results are based on the market-based electricity approach applied to the foreground system (A3). Further details on electricity data are provided in the Additional Requirements section.

### Core environmental impact indicators

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	2.95e+00	3.15e-02	2.45e-03	2.90e-03	1.39e-04	0.00e+00	-1.01e-02
GWP-fossil	kg CO <sub>2</sub> -eq.	2.71e+00	3.14e-02	2.45e-03	2.90e-03	1.38e-04	0.00e+00	-9.64e-03
GWP-biogenic	kg CO <sub>2</sub> -eq.	2.38e-01	1.58e-05	2.45e-07	1.45e-06	0.00e+00	0.00e+00	-4.21e-04
GWP-luluc	kg CO <sub>2</sub> -eq.	5.40e-03	1.12e-05	2.13e-07	1.03e-06	4.07e-07	0.00e+00	-8.25e-06
ODP	kg CFC-11-Eq	4.16e-08	6.55e-10	3.75e-11	6.04e-11	2.31e-12	0.00e+00	-2.92e-10
AP	mol H <sup>+</sup> -Eq	8.71e-03	7.42e-05	2.21e-05	6.85e-06	6.97e-07	0.00e+00	-1.18e-05
EP-freshwater	kg P-Eq	2.64e-03	2.21e-06	7.14e-08	2.04e-07	1.19e-07	0.00e+00	-5.27e-06
EP-marine	kg N-Eq	3.11e-03	1.95e-05	1.03e-05	1.80e-06	1.22e-07	0.00e+00	-4.10e-06
EP-terrestrial	mol N-Eq	2.17e-02	2.11e-04	1.12e-04	1.94e-05	1.08e-06	0.00e+00	-3.34e-05
POCP	kg NMVOC-Eq	6.52e-03	1.29e-04	3.35e-05	1.19e-05	3.65e-07	0.00e+00	-1.61e-05
ADPE	kg Sb-Eq	4.52e-05	8.98e-08	8.79e-10	8.29e-09	3.34e-10	0.00e+00	-9.31e-09
ADPF	MJ, net calorific value	5.32e+01	4.72e-01	3.21e-02	4.35e-02	3.17e-03	0.00e+00	-1.53e-01
WDP	m <sup>3</sup> world Eq deprived	6.67e-01	2.37e-03	7.85e-05	2.19e-04	8.11e-05	0.00e+00	-8.96e-04

**GWP-total:** Global Warming Potential - total , **GWP-fossil:** Global warming potential - fossil , **GWP-biogenic:** Global Warming Potential - biogenic , **GWP-luluc:** Global Warming Potential - luluc , **ODP:** Depletion potential of the stratospheric ozone layer , **AP:** Acidification potential, Accumulated Exceedance , **EP-freshwater:** Eutrophication potential - freshwater , **EP-marine:** Eutrophication potential - marine , **EP-terrestrial:** Eutrophication potential - terrestrial , **POCP:** Photochemical Ozone Creation Potential , **ADPE:** Abiotic depletion potential - non-fossil resources , **ADPF:** Abiotic depletion potential - fossil resources , **WDP:** Water (user) deprivation potential

### Additional indicators

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
PM	disease incidence	5.36e-08	3.06e-09	4.74e-09	2.82e-10	3.16e-12	0.00e+00	-6.36e-11
IRP	kBq U235-Eq	5.11e-01	5.73e-04	1.44e-05	5.29e-05	8.61e-05	0.00e+00	-9.61e-04
ETP-fw	CTUe	1.85e+01	1.12e-01	4.54e-03	1.03e-02	6.60e-04	0.00e+00	-1.79e-02
HTP-c	CTUh	5.47e-09	2.01e-10	9.58e-12	1.86e-11	1.08e-12	0.00e+00	-1.56e-11
HTP-nc	CTUh	3.69e-08	3.11e-10	4.35e-12	2.87e-11	2.41e-12	0.00e+00	-3.44e-11
SQP	dimensionless	9.30e+00	4.75e-01	2.25e-03	4.38e-02	5.46e-04	0.00e+00	-1.12e-02

**PM:** Potential incidence of disease due to PM emissions , **IRP:** Potential Human exposure efficiency relative to U235 , **ETP-fw:** Potential Comparative Toxic Unit for ecosystems , **HTP-c:** Potential Comparative Toxic Unit for humans - cancer effects , **HTP-nc:** Potential Comparative Toxic Unit for humans - non-cancer effects , **SQP:** Potential Soil quality index . **IRP:** This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator. **ETP-fw, HTP-c, HTP-nc** and **SQP:** The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.

## Use of resources

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
PERE	MJ	7.65e+00	7.49e-03	1.96e-04	6.91e-04	7.22e-04	0.00e+00	-1.50e-02
PERM	MJ	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
PERT	MJ	7.65e+00	7.49e-03	1.96e-04	6.91e-04	7.22e-04	0.00e+00	-1.50e-02
PENRE	MJ	4.22e+01	4.72e-01	3.21e-02	4.35e-02	3.17e-03	0.00e+00	-1.53e-01
PENRM	MJ	1.10e+01	0.00e+00	0.00e+00	0.00e+00	-1.10e+01	0.00e+00	0.00e+00
PENRT	MJ	5.32e+01	4.72e-01	3.21e-02	4.35e-02	-1.10e+01	0.00e+00	-1.53e-01
SM	kg	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
RSF	MJ	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
NRSF	MJ	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
FW	m <sup>3</sup>	2.27e-02	6.86e-05	2.08e-06	6.33e-06	2.59e-06	0.00e+00	-2.97e-05

**PERE:** Primary energy resources - renewable: use as energy carrier , **PERM:** Primary energy resources - renewable: used as raw materials , **PERT:** Primary energy resources - renewable: total , **PENRE:** Primary energy resources - non-renewable: use as energy carrier , **PENRM:** Primary energy resources - non-renewable: used as raw materials , **PENRT:** Primary energy resources - non-renewable: total , **SM:** Use of secondary material , **RSF:** Renewable secondary fuels , **NRSF:** Non-renewable secondary fuels , **FW:** Net use of fresh water

## Waste flows

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
HWD	kg	9.26e-04	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
NHWD	kg	2.90e-02	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
RWD	kg	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00

**HWD:** Hazardous waste disposed , **NHWD:** Non hazardous waste disposed , **RWD:** Radioactive waste disposed

## Output flows

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
CRU	kg	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
MFR	kg	2.34e-02	0.00e+00	0.00e+00	0.00e+00	5.60e-01	0.00e+00	0.00e+00
MER	kg	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
EEE	MJ	3.26e-02	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
EET	MJ	7.58e-02	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00

**CRU:** Components for re-use , **MFR:** Materials for recycling , **MER:** Materials for energy recovery , **EEE:** Exported electrical energy , **EET:** Exported thermal energy

Name	Value	Unit
Biogenic carbon content in product	0.00e+00	kg C
Biogenic carbon content in accompanying packaging	1.51e-02	kg C

## Additional requirements

### Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity consumption in the manufacturing phase is composed from the sources below. This EPD follows the market-based approach.

Approach	Electricity	Quantity [kWh]	Emission Factor [kg CO <sub>2</sub> e/kWh]
market-based	ecoinvent: electricity, high voltage, residual mix (PL)	0.05	1.10
( location-based )	( ecoinvent: market for electricity, high voltage (PL) )	( 0.05 )	( 0.90 )

Rows marked with ( ) are provided for reference and not used in the assessment.

### Dangerous substances

The product contains no hazardous substances given by the REACH Candidate List or the Norwegian Priority List.

## Additional environmental information







### Additional environmental impact indicators required in NPCR Part A for construction products

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
GWP-IOBC	kg CO <sub>2</sub> -eq.	2.73e+00	3.14e-02	2.45e-03	2.90e-03	1.39e-04	0.00e+00	-9.67e-03

**GWP-IOBC:** Global Warming Potential - Instantaneous oxidation of biogenic carbon

## Bibliography

CEN/TR 15941:2010	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data
EN 15804:2012+A2:2019	Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
EN 15942:2022-04	Sustainability of construction works - Environmental product declarations - Communication format business-to-business
ISO 14025:2011-10	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
ISO 14040:2021-02	Environmental management - Life cycle assessment - Principles and framework
ISO 14044:2021-02	Environmental management - Life cycle assessment - Requirements and guidelines
EF 3.1	Environmental Footprint (EF) Life Cycle Impact Assessment method - Characterisation Factors version 3.1, European Commission, Joint Research Centre (JRC)
Eurobitume. (2025). Life Cycle Assessment 4.0 for bitumen. Brussels	European Bitumen Association (Eurobitume). Retrieved from <a href="https://eurobitume.eu/wp-content/uploads/2025/03/EB-LCA-4.0-2025.pdf">https://eurobitume.eu/wp-content/uploads/2025/03/EB-LCA-4.0-2025.pdf</a>
ecoinvent 3.10	ecoinvent, Zurich, Switzerland, database version 3.10
NPCR Part A:2021	Construction products and services, Version 2.0. Issue date: 24.03.2021; validity extended to 24.03.2026.

 <p>Powered by EPD-Norway</p>	<b>Program Operator</b>	Phone	+47 23 08 80 00
	EPD Global P.O. Box 5250 Majorstuen, N-0303 Oslo Norway	Email	post@epd-norge.no
 <p>Powered by EPD-Norway</p>	<b>Publisher</b>	Phone	+47 23 08 80 00
	EPD Global P.O. Box 5250 Majorstuen, N-0303 Oslo Norway	Email	post@epd-norge.no
 <p>A Simpson Strong-Tie® Company</p>	<b>Owner of the declaration</b>	Phone	+41 41 825 00 70
	S&P Clever Reinforcement Company AG Seewernstrasse 127, 6423 Seewen Switzerland	Email	info@sp-reinforcement.ch
 <p>A Simpson Strong-Tie® Company</p>	<b>Author of the life cycle assessment</b>	Phone	+41 41 825 00 70
	S&P Clever Reinforcement Company AG Seewernstrasse 127, 6423 Seewen Switzerland	Email	info@sp-reinforcement.ch
	ECO Platform	Web	<a href="http://www.eco-platform.org">www.eco-platform.org</a>
	ECO Portal	Web	<a href="#">ECO Portal</a>
	<b>Developer of EPD generator</b>	Phone	+49 176 56 96 77 91
	Emidat GmbH Sandstraße 33, 80335 München Germany	Email	epd@emidat.com
		Web	<a href="http://www.emidat.com">www.emidat.com</a>